

Antenna Mutual Coupling Suppression Over Wideband Using Embedded Periphery Slot for Antenna Arrays

Mohammad Alibakhshikenari^{1*}, Bal S. Virdee², Panchamkumar Shukla², Chan H. See³, Raed Abd-Alhameed⁴,

Mohsen Khalily⁵, Francisco Falcone⁶, and Ernesto Limiti¹

¹ Electronic Engineering Department, University of Rome “Tor Vergata”, Via del Politecnico 1, 00133, Rome, ITALY

² London Metropolitan University, Center for Communications Technology, School of Computing & Digital Media, London N7 8DB, UK

³ School of Engineering, University of Bolton, Deane Road, Bolton, BL3 5AB, UK

⁴ School of Electrical Engineering & Computer Science, University of Bradford, UK

⁵ 5G innovation Center (5GIC), Institute for Communication Systems (ICS), University of Surrey, Guildford, GU2 7XH, U.K

⁶ Electric and Electronic Engineering Department, Universidad Pública de Navarra, SPAIN

* alibakhshikenari@ing.uniroma2.it

Abstract- This paper presents a new approach to suppress interference between neighbouring radiating elements resulting from surface wave currents. The proposed technique will enable the realization of low-profile implementation of highly dense antenna configuration necessary in SAR and MIMO communication systems. Unlike other conventional techniques of mutual coupling suppression where decoupling slab is located between the radiating antennas the proposed technique is simpler and only requires embedding linear slots near the periphery of the patch. Attributes of this technique are (i) significant improvement in the maximum isolation between the adjacent antennas by 26.7 dB in X-band, & >15 dB in Ku and K-bands; (ii) reduction in edge-to-edge gap between antennas to 10 mm (0.37 λ); and (iii) improvement in gain by >40% over certain angular directions, which varies between 4.5 dBi to 8.2 dBi. The proposed technique is simple to implement at low-cost.

Key Words- Mutual coupling suppression, slotted array antennas, synthetic aperture radar (SAR), Multiple-Input Multiple-Output (MIMO) systems, decoupling method.

I. INTRODUCTION

Multiple-input multiple-output (MIMO) systems enable high-capacity wireless communications without increasing the signal bandwidth or signal-to-noise ratio (SNR). This is because the multiple data streams can be transmitted simultaneously by using multiple antennas (antenna array) at the transmitter and receiver. To realise compact MIMO antennas the critical challenge is to minimize the signal correlation between antennas over a wide frequency range. When multiple antennas are placed close the mutual coupling can degrade the radiation performances of the antennas and the channel capacity of MIMO systems.

Antenna size is determined mainly by its operating frequency, and therefore antennas occupy the largest space in wireless communication systems. Reducing the antenna size can be challenging as many factors need to be considered including size, weight, performance and cost of manufacture. Although array antennas based on microstrip integrated technology improve these factors; however, the strong mutual coupling between the adjacent antennas can severely degrade the antenna's performance in terms of gain, bandwidth and radiation pattern. It is evident in [1-3] that although the proximity of the radiating elements in MIMO satisfies the required compactness but this is at the cost of performance degradation.

To enable the widespread use of microstrip based antenna arrays therefore requires the reduction of the mutual coupling between the array elements. In addition, to extend the beam scanning range of MIMO antennas, a smaller gap between antennas is necessary in the array to enable the scanning over a large angle. However, as the mutual coupling is predominantly strong in closely spaced antennas this can deteriorate the input impedance of each radiating element in the array to adversely affect the radiation efficiency and radiation pattern of the array [4-5].

Various techniques have been previously proposed to reduce the mutual coupling between adjacent elements in an antenna array including the use of cavity backed [6], substrate removal [7], defected ground structures (DGS) [8],


metamaterial insulator [9], slotted complementary split-ring resonators [10], defected wall structure [11], and employing [electromagnetic band gap \(EBG\)](#) structures between two patches in microstrip antennas [12]. Although these techniques improve the reduction in mutual coupling however this is not enough for MIMO systems where compactness is required.

This paper presents a novel technique to reduce mutual coupling between adjacent radiating elements in an antenna array [by increasing the isolation between the elements. Unlike conventional techniques where decoupling slab or DGS is inserted between neighbouring antennas in the array the proposed technique involves simply of embedding different lengths of slots near the outer most edge of the radiating patch. The proposed technique should enable the realization of highly dense antenna configuration with a reduced form factor which is necessary in SAR and MIMO communication systems.](#) The resulting antenna array with the proposed technique is shown to exhibit significantly improved isolation between neighbouring patch elements (26.7 dB in X-band, & >15 dB in Ku and K-bands) and optimum gain performance (4.5 dBi to 8.2 dBi) over certain angular directions. [With the proposed technique the gap between the patches is reduced which should enable the design of a compact antenna array with the ability to scan over a larger angle.](#)


II. PROPOSED SLOT ANTENNA FOR ANTENNA ARRAYS

The reference array antenna is a 1×2 arrangement of rectangular microstrip patches, as shown in Fig. 1(a). Standard patch design was used to implement it on a standard FR-4 lossy substrate with dielectric constant of $\epsilon_r=4.3$, $\tan\delta=0.025$, and thickness of 1.6 mm. The performance of the antenna was verified using two commercially available [3D electromagnetic tools, namely, CST Microwave Studio® and ANSYS High Frequency Structure Simulator \(HFSS\).](#) The two patches are identical [in size](#) with dimensions of 25×20 mm² and edge-to-edge distance between radiation elements of 10 mm.


The return-loss (S_{11}) and isolation (S_{12}) of the reference array are plotted in Fig. 2. It's clear that, the reference antenna array covers three bands, i.e. X, Ku, and K. To increase the isolation between elements in the array linear slots are embedded around the periphery of the patch, as illustrated in Fig. 1(b). Dimensions of the slot are given in Fig. 1(b), and the overall size of the array is given in Fig. 1(c). The return-loss and isolation response of the reference and proposed antenna array are shown in Fig. 2. The average and peak mutual coupling improvement resulting from the proposed technique are 14 dB & 26.7 dB (X-band); 10 dB & 12.6 dB (first Ku-band); 13 dB & >11 dB (second Ku-band); and 10 dB & 15 dB (third Ku-band and K-band). Tables I-IV are given to facilitate comparison the maximum and average isolation of the reference and the proposed arrays over X, Ku and K-bands, where the bandwidth is defined for $|S_{11}| \leq -10\text{dB}$. It is also evident from the plots in Fig. 2 that the slotted antenna array has a significantly better impedance match performance than the reference array. [With the proposed technique the overall antenna design is simple, and the linear slots etched in the patch are easy to implement in practice, which thus reduces the overall manufacturing cost of the antenna array.](#)

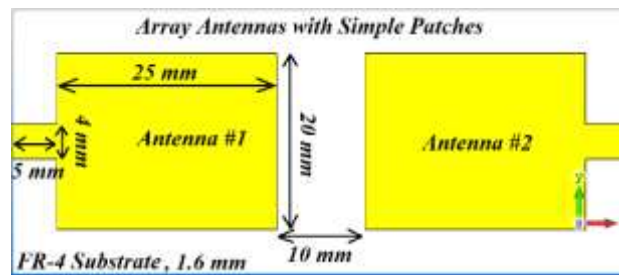

(a) Simple reference array antenna


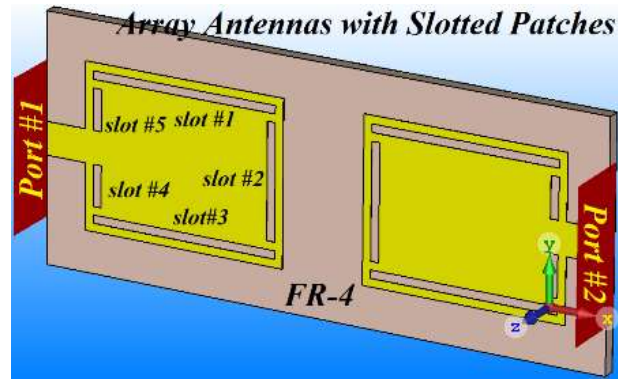



(b) Proposed slotted array antenna. Length of slots #1 to #5 are 23 mm, 14 mm, 23 mm, 5 mm, & 5 mm, respectively. Slot width is 1 mm.

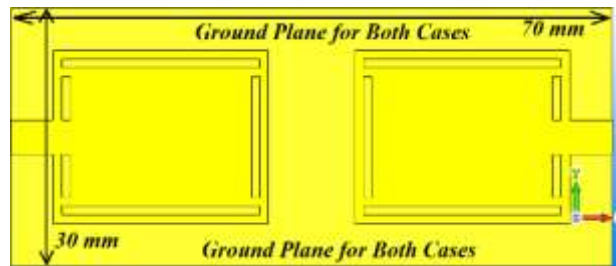


(c) Ground plane for both simple and slotted arrays

Fig. 1. Array antenna prototypes (reference and proposed).

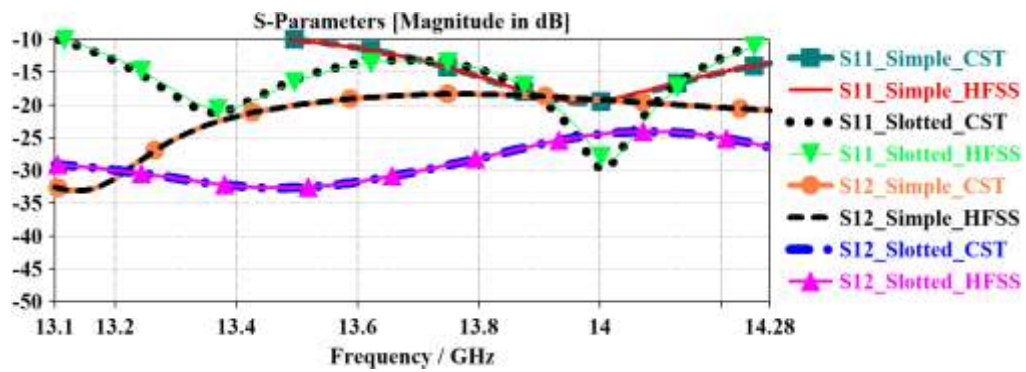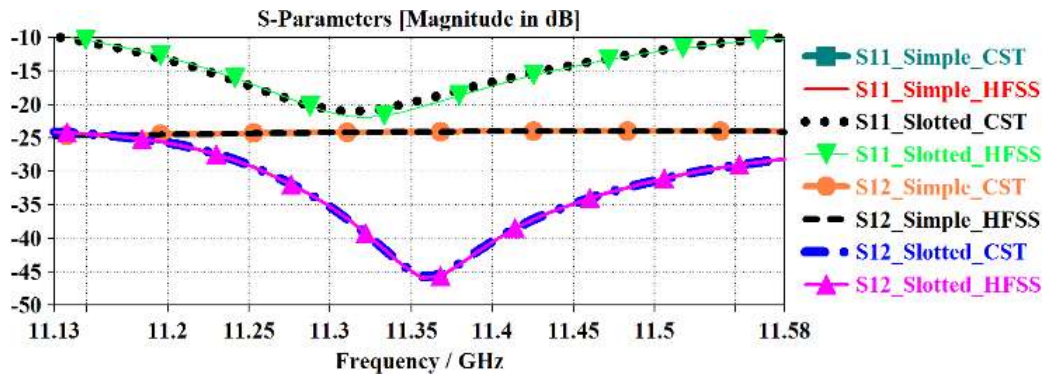

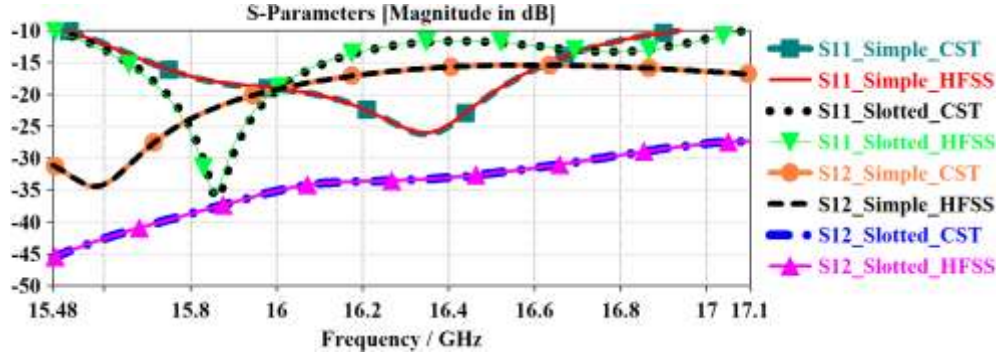

(c) Coverage over the second Ku-band

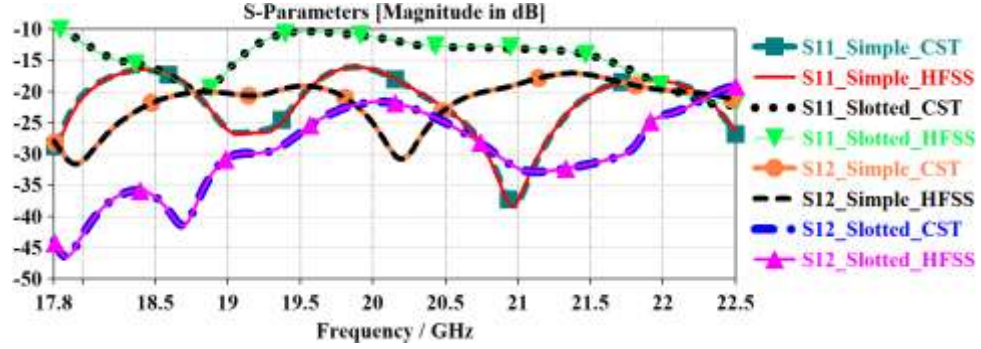

(d) Coverage over the third Ku-band and K-band

Fig. 2. Reflection and transmission coefficients of the reference and proposed antenna array.

TABLE I. ISOLATION IN THE X-BAND

First Band: 11.13–11.58 GHz ($\Delta f = 450$ MHz, FBW=3.88%)		
	Maximum	Average
Reference Patch Antennas	-24 dB @ 11.36 GHz	-24 dB
Slotted Patch Antennas	-45.7 dB @ 11.36 GHz	-38 dB
Supression Improvement	26.7 dB @ 11.36 GHz	14 dB

TABLE II. ISOLATION IN THE FIRST Ku-BAND

Second Band: 13.1–14.28 GHz ($\Delta f = 1.18$ GHz, FBW=8.62%)		
	Maximum	Average
Reference Patch Antennas	-20 dB @ 14.28 GHz	-19 dB
Slotted Patch Antennas	-32.63 dB @ 13.56 GHz	-29 dB
Supression Improvement	12.6 dB	10 dB

TABLE III. ISOLATION IN THE SECOND Ku-BAND


Third Band: 15.48–17.1 GHz ($\Delta f = 1.62$ GHz, FBW=9.95%)		
	Maximum	Average
Reference Patch Antennas	-34.4 dB @ 15 GHz	-24 dB
Slotted Patch Antennas	-45.6 dB @ 15 GHz	-37 dB
Supression Improvement	>11 dB @ 15 GHz	13 dB

TABLE IV. ISOLATION IN THE THIRD Ku-BAND AND K-BAND


Fourth Band: 17.8–22.5 GHz ($\Delta f = 4.7$ GHz, FBW = 23.32%)		
	Maximum	Average
Simple Patches	-31.6 dB @ 17.9 GHz	-24 dB
Slotted Antennas	-46.4 dB @ 17.9 GHz	-34 dB
Supression Improvement	15 dB @ 17.9 GHz	10 dB

The input impedance and admittance of the proposed slotted antenna array its operating range using circuit model and CST Microwave Studio® are shown in Fig. 3. There is very good correlation in input impedance and admittance responses between the circuit model and CST Microwave Studio®.


Surface current distribution over the reference and the slotted antenna array are shown in Fig. 4. It is evident from these figures the slots behave as a decoupling structure that soak up the surface waves that would otherwise couple with the adjacent radiating elements.

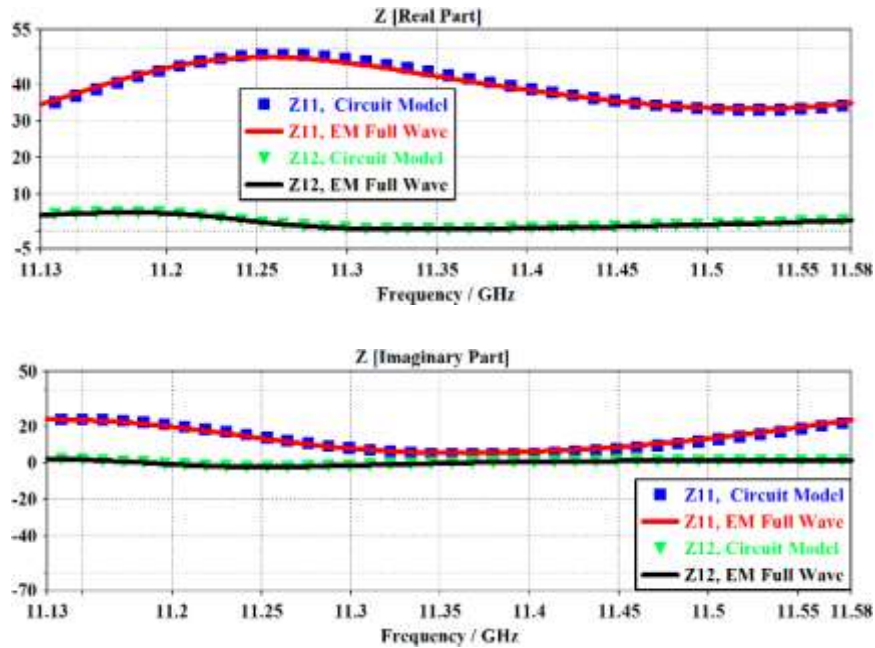


(a) Coverage over X-band

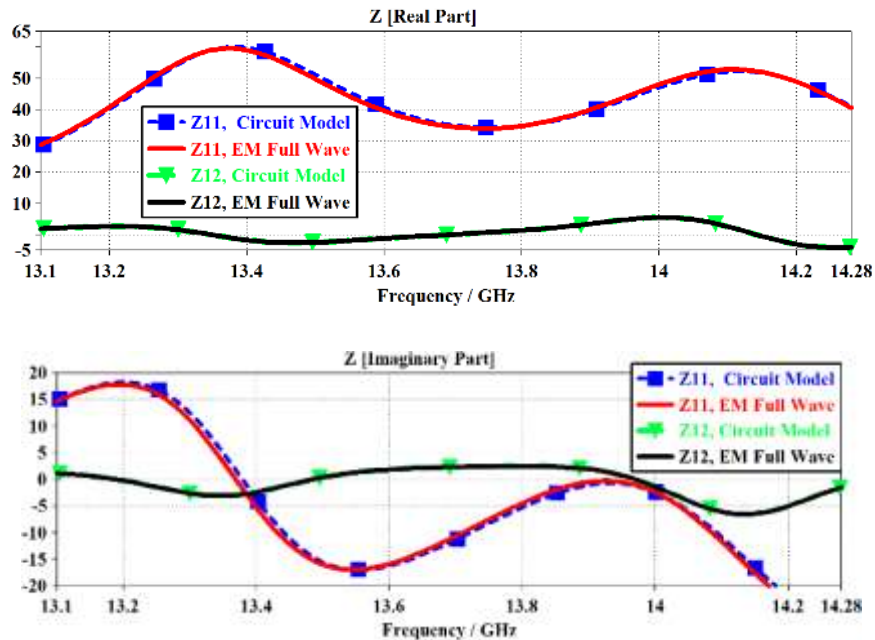

(b) Coverage over the first Ku-band

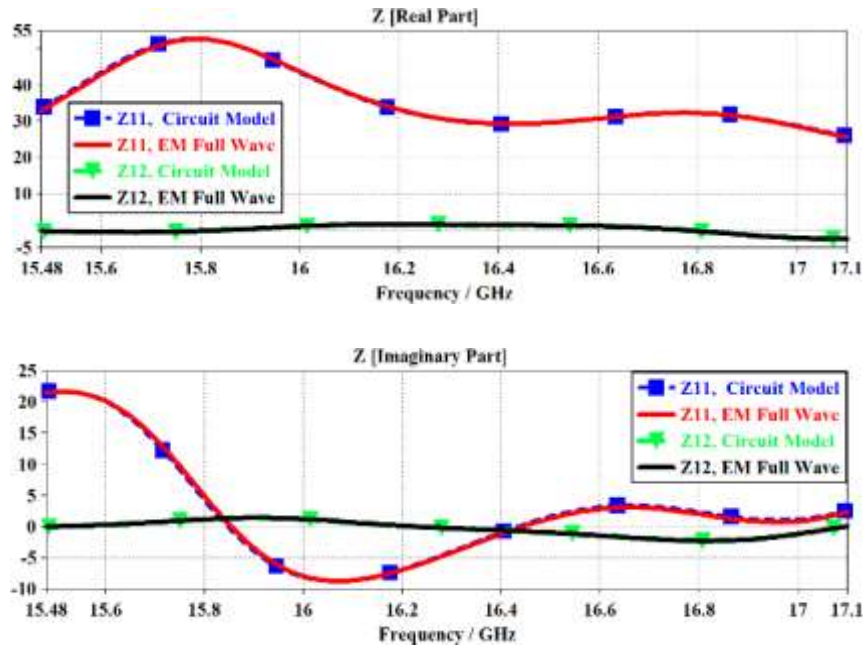

(c) Coverage over the second Ku-band

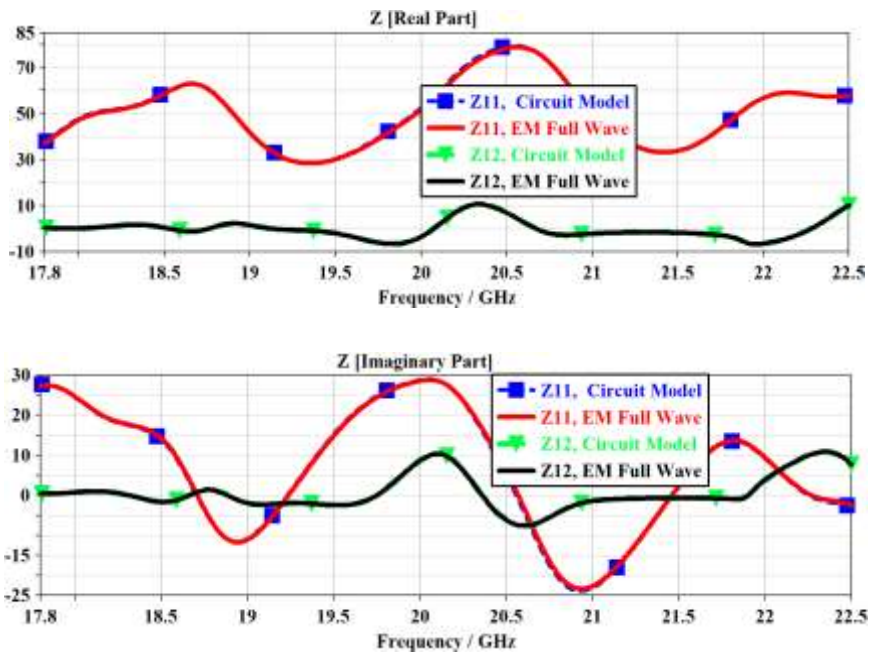

(d) Coverage over the third Ku-band and K-band

Fig. 3. Input impedance (Ω) & admittance ($1/\Omega$) of the proposed slotted array antenna.



Port #1 excited



Port #2 excited

Reference Array @ 11.37 GHz in X-band




Port #1 excited




Port #2 excited

Proposed Slotted Array @ 11.37 GHz in X-band

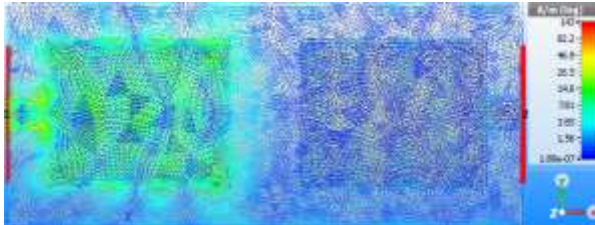

Port #1 excited

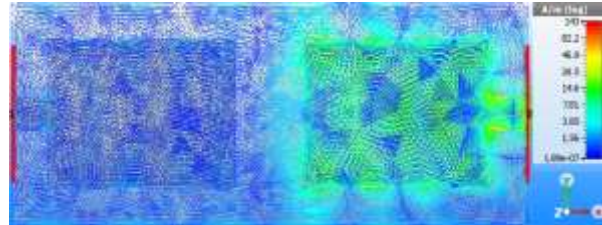

Port #2 excited

Reference Array @ 13.6 GHz in Ku-band




Port #1 excited




Port #2 excited

Proposed Slotted Array @ 13.6 GHz in Ku-band

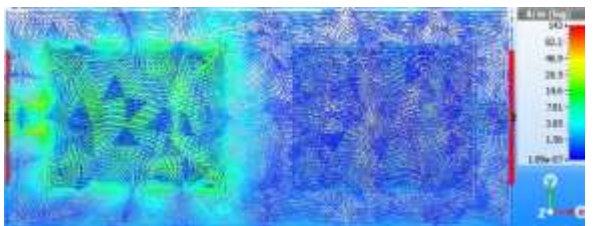


Port #1 excited

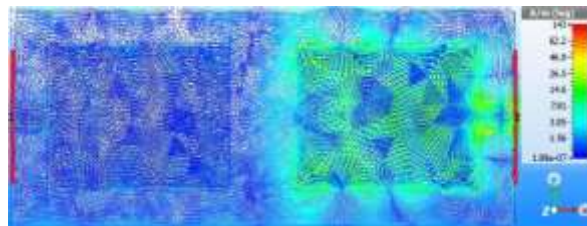


Port #2 excited

Reference Array @ 15.9 GHz in Ku-band

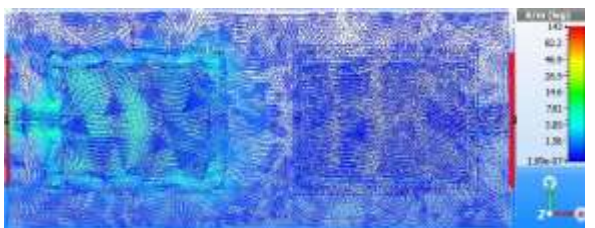


Port #1 excited

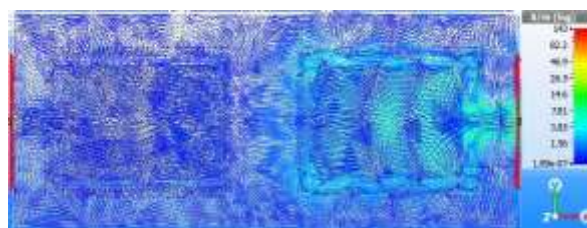


Port #2 excited

Proposed Slotted Array @ 15.9 GHz in Ku-band

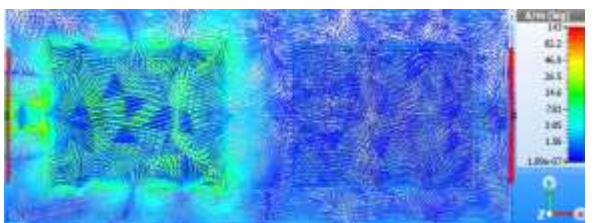

Port #1 excited

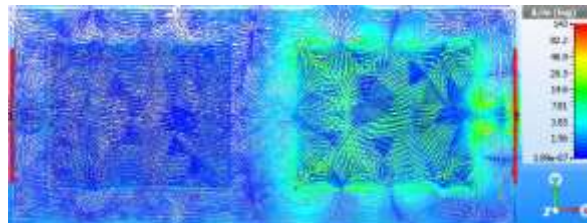

Port #2 excited

Reference Array @ 18.7 GHz in K-band

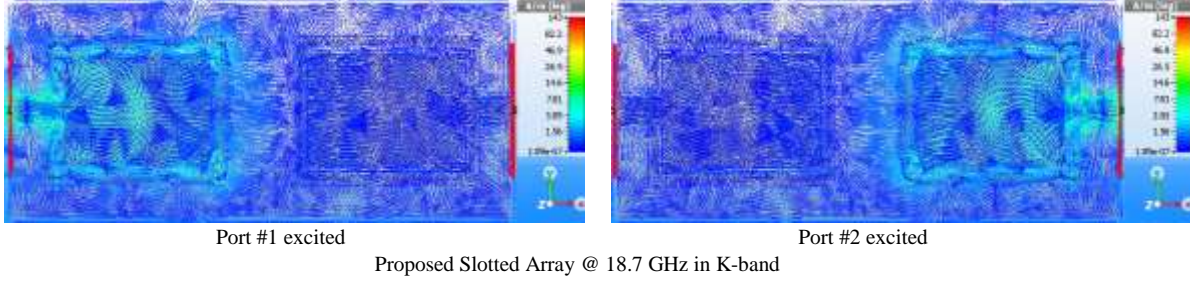


Fig. 4. Surface current distribution over the reference and slotted arrays.

Radiation patterns of the **simple reference (Sim.)** and proposed **slotted (Slo.)** antenna arrays in the **horizontal (H)** and **vertical (V)** planes are shown in Fig. 5. After applying the proposed slots to the patch array the radiation pattern in the H-plane is distorted with large variation in the radiation pattern. Over certain angular directions the array exhibits better gain performance than others. At 11.37 GHz the gain varies from 5.9 dBi to 8.2 dBi, and at 15.9 GHz it varies from 3.1 dBi to 4.5 dBi.

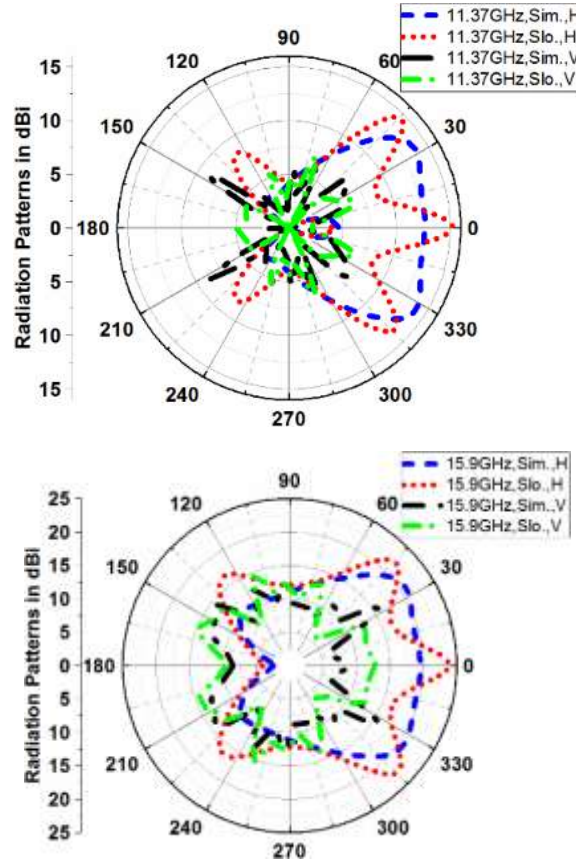


Fig. 5. Radiation patterns of the simple reference (sim.) and proposed slotted (slo.) array antennas in the horizontal (H) and vertical (V) planes at 11.37 GHz & 15.9 GHz.

The performance of the proposed technique is compared with other mutual coupling reduction mechanisms in Table V. Application of decoupling slab between the array elements is a popular **conventional** technique. Although this results in reducing mutual coupling it does not contribute in reducing the overall size of the array. It is demonstrated here the proposed technique provides a simple solution of both reducing the surface currents and therefore enhancing the isolation between neighbouring radiators, and overall size reduction, but further work is needed to improve its radiation characteristics. The proposed method offers an average and maximum isolation between transmit and receive antennas of ~15 dB and more than >26 dB, respectively, over a narrow angular range which is better than other techniques. The advantage of the proposed technique is its simplicity.

TABLE V. COMPARISON BETWEEN THE PROPOSED ARRAY WITH THE RECENT WORKS

Ref.	Method	Dimensions in mm ³	Max. isolation	Bandwidth	Bands	Reduction in bandwidth	Rad. pattern deterioration	No. of elements	Use of DGS	Edge-to-Edge Gap
[12]	EBG	6.8×5×1.92	8.8 dB	Narrow	Single	Yes	-	2	Yes	0.75λ ₀
[13]	Fractal load & DGS	17.6×17×1	16 dB	Narrow	Single	Yes	No	2	Yes	0.22λ ₀
[14]	U-Shaped Resonator	24.25×18.2×1.6	10 dB	Narrow	Single	Yes	Yes	2	Yes	0.6λ ₀
[15]	I-Shaped Resonator	18.35×30×1.58	30 dB	Narrow	Single	Yes	Yes	2	Yes	0.45λ ₀
[16]	W/g MTM	40.34×40.34×0.76	18 dB	Narrow	Single	Yes	No	2	Yes	0.093λ ₀
[17]	Ground Slot	15.5×15.5×0.8	40 dB	Narrow	Single	Yes	Yes	2	Yes	0.23λ ₀
[18]	SCSRR	20×8×0.8	10 dB	Narrow	Single	Yes	Yes	2	Yes	0.25λ ₀
[19]	SCSSRR	15×15×1.27	14.6 dB	Narrow	Single	Yes	Yes	2	Yes	0.125λ ₀
[20]	Compact EBG	22×22×1.27	17 dB	Narrow	Single	Yes	Yes	2	Yes	0.8λ ₀
[21]	Meander line	46.82×38.96×1.5	10 dB	Narrow	Single	Yes	No	2	Yes	0.055λ ₀
[22]	UC-EBG	24.8×24.6×1.59	14 dB	Narrow	Single	Yes	Yes	2	Yes	0.5λ ₀
[23]	EBG	78.26×78.26×2.54	10 dB	Narrow	Single	Yes	Yes	2	Yes	0.5λ ₀
[24]	EBG	35×35×1.6	5 dB	Medium	Single	Yes	-	2	Yes	0.6λ ₀
[25]	EBG	-	13 dB	Medium	Single	Yes	Yes	2	Yes	0.5λ ₀
[26]	EBG&DGS	17.62×17.62×1.143	16 dB	Narrow	Single	Yes	No	2	Yes	0.6λ ₀
[27]	EBG	27.5×20×2	4 dB	Narrow	Single	Yes	Yes	2	Yes	0.84λ ₀
[28]	Slotted meander-line	16.86×16.86×1.6	16 dB	Narrow	Single	Yes	Yes	2	No	0.11λ ₀
[29]	W/g MTM	25.35×21×1.43	20 dB	Narrow	Single	Yes	No	2	Yes	0.125λ ₀
This work	Slots	25×20×1.6	>26 dB	Wide (>23%)	Four	No	No	4	No	0.37λ₀

III. CONCLUSION

A simple technique is demonstrated that shows reduction in mutual coupling between adjacent radiating elements, which also allows the edge-to-edge gap between adjacent elements in an array to be reduced. This should enable beam-scanning over a larger angle in MIMO systems. This was achieved by embedding different lengths of slots near periphery of the patch antenna. The resulting antenna array exhibits significantly improved isolation between neighbouring patch elements and gain performance over a narrower angular direction.

ACKNOWLEDGMENTS

This work is partially supported by innovation programme under grant agreement H2020-MSCA-ITN-2016 SECRET-722424.

REFERENCES

- [1] H.-S. Hung, H.-Y. Lu, and Y.-H. Cheng, "A low-complexity genetic algorithm for joint antenna selection and power allocation in hybrid STBC-SM MIMO systems", *Wireless Personal Communications* 88.2 (2016): pp. 305-318.
- [2] J. Subhashini, and V. Bhaskar, "Spectrum efficiency evaluation with multiuser scheduling and MRC antenna diversity with effects of combining errors for Rayleigh fading channels with feedback", *Wireless Personal Communications* 83.1 (2015): pp. 791-810.
- [3] S.-M. Tseng, and S.-H. Wang, "Distributed quasi-orthogonal space time block code for four transmit antennas with information exchange error mitigation", *KSII Transactions on Internet and Information Systems*, Oct. 2013, 7, (6), pp. 2411-2429.
- [4] Leeladhar Malviya, Rajib Kumar Panigrahi, and M. V. Kartikeyan, "MIMO antennas with diversity and mutual coupling reduction techniques: a review", *International Journal of Microwave and Wireless Technologies*, 2017, 9, (8), 1763-1780.
- [5] Xiao, S., Liu, C., Wang, R., et al.: 'Wide-angle scanning planar phased array antenna'. *IEEE Int. Conf. on Microwave and Millimeter Wave Technology*, December 2016, 2, pp. 589-589.
- [6] Hikage, T., Omiya, M., Itoh, K.: 'Performance evaluation of cavity-backed slot antennas using the FDTD technique'. *Proc. IEEE Antennas and Propagation Society Int. Symp.*, July 2000, pp. 1484-1487.
- [7] Vaughan, M.J., Hur, K.Y., Compton, R.C.: 'Improvement of microstrip patch antenna radiation patterns', *IEEE Trans. Antennas Propag.*, 1994, 42, (60), pp. 882-885.
- [8] Xiao, S., Tang, M.C., Bai, Y.Y., et al.: 'Mutual coupling suppression in microstrip array using defected ground structure', *IET Microw. Antennas Propag.*, 2011, 5, (12), pp. 1488-1492.
- [9] Abdalla, M.A., Ibrahim, A.A.: 'Compact and closely spaced meta-material MIMO antenna with high isolation for wireless applications'. *30th National NRCS2013*, January 2013, pp. 19-26.
- [10] Dimitrios, K.N., Traianos, V.Y.: 'Compact split-ring resonator-loaded multiple-input-multiple-output antenna with electrically small elements and reduced mutual coupling', *IET Microw. Antennas Propag.*, 2013, 7, (6), pp. 421-429.
- [11] Abushamleh, S., Al-Rizzo, H., Abosh, A., et al.: 'Mutual coupling reduction between two patch antennas using a new miniaturized soft surface structure'. *IEEE Antennas and Propagation Society Int. Symp. (APSURSI)*, July 2013, pp. 1822-1823.
- [12] F. Yang, Rahmat-Samii, Y.: 'Microstrip antennas integrated with electromagnetic band-gap (EBG) structures: A low mutual coupling design for array applications', *IEEE Trans. Antennas Propag.*, 2003, 51, (10), pp. 2936-2946.

- [13] X. Yang, Y. Liu, Y.-X. Xu, and S.-X. Gong, "Isolation enhancement in patch antenna array with fractal UC-EBG structure and cross slot", *IEEE Antennas Wireless Propag. Lett.*, 2017, 16, pp. 2175-2178.
- [14] M. T. Islam, and M. S. Alam, "Compact EBG structure for alleviating mutual coupling between patch antenna array elements," *Progress in Electromagnetics Research*, 2013, 137, pp. 425-438.
- [15] C. K. Ghosh, and S. K. Parui, "Reduction of mutual coupling between E-shaped microstrip antennas by using a simple microstrip I-section," *Microwave and Optical Tech. Lett.*, 2013, 55, (11), pp. 2544-2549.
- [16] Z. Qamar, H.-C. Park, "Compact waveguided metamaterials for suppression of mutual coupling in microstrip array," *Progress in Electromagnetics Research*, 2014, 149, pp. 183-192.
- [17] J. OuYang, F. Yang, and Z. M. Wang, "Reduction of mutual coupling of closely spaced microstrip MIMO antennas for WLAN application," *IEEE Antennas Wireless Propag. Lett.*, 2011, 10, pp. 310-312.
- [18] F. G. Zhu, J. D. Xu, and Q. Xu, "Reduction of mutual coupling between closely packed antenna elements using defected ground structure," *Electronics Letters*, 2009, 45, (12), pp. 601-602.
- [19] M. M. B. Suwailam, O. F. Siddiqui, and O. M. Ramahi, "Mutual coupling reduction between microstrip patch antennas using slotted-complementary split-ring resonators," *IEEE Antennas Wireless Propag. Lett.*, 2010, 9, pp. 876-878.
- [20] M. F. Shafique, Z. Qamar, L. Riaz, R. Saleem, and S. A. Khan, "Coupling suppression in densely packed microstrip arrays using metamaterial structure," *Microwave and Optical Technology Letters*, 2015, 57, (3), pp. 759-763.
- [21] S. Farsi, D. Schreurs, and B. Nauwelaers, "Mutual coupling reduction of planar antenna by using a simple microstrip U-section," *IEEE Antennas Wireless Propag. Lett.*, 2012, 11, pp. 1501-1503.
- [22] J. Ghosh, S. Ghosal, D. Mitra, and S. Ranjan B. Chaudhuri, "Mutual coupling reduction between closely placed microstrip patch antenna using meander line resonator," *Progress in Electromagnetic Research Letters*, 2016, 59, pp. 115-122.
- [23] H. S. Farahani, M. Veysi, M. Kamyab, and A. Tadjalli, "Mutual coupling reduction in patch antenna arrays using a UC-EBG superstrate," *IEEE Antennas Wireless Propag. Lett.*, 2010, 9, pp. 57-59.
- [24] E. Rajo-Iglesias, O. Quevedo-Teruel, and L. Inclan-Sanchez, "Mutual coupling reduction in patch antenna arrays by using a planar EBG structure and a multilayer dielectric substrate," *IEEE Trans. Antennas Propag.*, 2008, 56, (6), pp. 1648-1655.
- [25] M. J. Al-Hasan, T. A. Denidni, and A. R. Sebak, "Millimeter wave compact EBG structure for mutual coupling reduction applications," *IEEE Trans. Antennas Propag.*, 2015, 63, (2), pp. 823-828.
- [26] G. Exposito-Dominguez, J. M. Fernandez-Gonzalez, P. Padilla, and M. Sierra-Castaner, "Mutual coupling reduction using EBG in steering antennas," *IEEE Antennas Wireless Propag. Lett.*, 2012, 11, pp. 1265-1268.
- [27] A. Yu, and X. Zhang, "A novel method to improve the performance of microstrip antenna arrays using a dumbbell EBG structure," *IEEE Antennas Wireless Propag. Lett.*, 2003, 2, (1), pp. 170-172.
- [28] M. G. Alsath, M. Kanagasabai, and B. Balasubramanian, "Implementation of slotted meander line resonators for isolation enhancement in microstrip patch antenna arrays," *IEEE Antennas Wireless Propag. Lett.*, 2013, 12, pp. 15-18.
- [29] X. M. Yang, X. G. Liu, X. Y. Zhu, and T. J. Cui, "Reduction of mutual coupling between closely packed patch antenna using waveguide metamaterials," *IEEE Antennas Wireless Propag. Lett.*, 2012, 11, pp. 389-391.